DD10K

Yealink Ruggedized DECT Handset

The Yealink DECT dongle DD10K not only enables T41S/T42S/T54W to work concurrently with the Yealink DECT system as a handset after pairing with Yealink W60B/W70B/W80B/W90B DECT IP base station, but also enables T53/T53W/T54W/T57W/T58A/T58W/VP59 to work as a base station which can be registered with up to 4 compatible Yealink W52H/W56H/W53H/W73H/W78H/W57R/W59R handsets. Supported by a powerful transmission rate of 1152kbps/s, this solution provides you with a quick and reliable DECT connection without wiring or cabling troubles, and gives you the privilege of enjoying wireless communications in minutes. As a complement to the Yealink DECT series, attaching DD10K to your desk phone offers a new solution by combining the desk phone' s features with DECT capabilities.

Yealink DD10K is easy and safe to deploy, guaranteeing a flexible and optimal user experience.



Key Features and Benefits

- Compatible with Yealink SIP- T41S/T42S with FW 66.82.0.35 or later, SIP-T58A with FW V83 or later and SIP T53/T53W/T54W/T57W/T58W/VP59
- Reliable Connection
- Ease-of-use
- Plug and Play
- High Transmission Rate

Use Scenario of DD Phone (T54W+DD10K)

- Warehouse
- Supermarket
- Restaurant
- Others

Yealink




Specifications

Specifications	Description
Display	 1.8' 128x160 TFT color screen Intuitive user interface with icons and soft keys Caller ID with name and number Notification Light: voice mail, missed call Date & time (manual/auto synchronization) Screen saver Multilingual user interface Keypad backlight

Phone Features	 Up to 2 simultaneous calls per handset Handset select for receiving call Handset and number select for making call Auto intercom, auto answer 3-way conference Call forward: Always/Busy/No Answer Call waiting, mute, hold DND Call transfer Swap between calls Redial Speed dial Voice mail Silence Dial plan: Replace Rule/Area Code/Block Out Keypad lock Emergency call 100 phone book memory (store in the base)
	 Remote phonebook, LDAP, XML phonebook Phonebook search, blocklist Call history: All/Placed/Missed/Received (up to100 entries) Direct IP call without SIP proxy Reset to factory, reboot Anonymous call, anonymous call rejection OTA (Over-The-Air) upgrade via base station
Audio Features	 Full-duplex speakerphone HD audio Hearing Aid Compatibility (HAC) compliant Frequency response: 100 Hz–7 kHz FNR (Flexible Noise Reduction) Receiver volume control: 5 steps Ringer volume control: 5 steps+off 9 ringer melodies Multiple advisory tones Acoustic warning for low battery status DTMF
DECT	 DECT Transmission Rate: 1152 kbps/s 2 internal QWL omnidirectional antennas Power Consumption: 815 mW Frequency bands: 1880 – 1900 MHz (Europe), 1920 – 1930 MHz (US) DECT Range: Indoor Range: 20 m-50 m (The max distance is 50 m) Outdoor Range: 300 m (In clear view and ideal conditions)
Physical Features	 Interface: USB 2.0 Dimension: 73 mm x 27 mm x 8 mm Weight: 2 g

Package Features	 Package contents: DD10K DECT USB Dongle Quick start guide Qty/CTN: 80 PCS Giftbox size: 136 mm x 70 mm x 40 mm Carton meas: 443 mm x 305 mm x 285 mm N.W: 4.0 kg G.W: 4.6 kg
Compliance	CE FCC Internet Inter

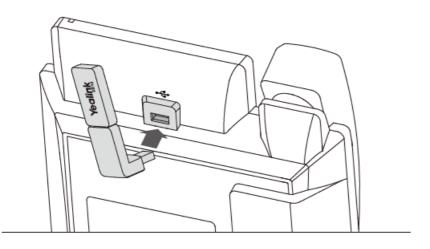

Click Here to go to the product introduction on the Yealink official website.